

GL22 GL32


MIYOTA



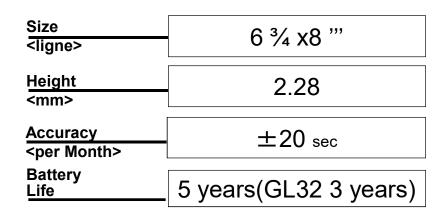


Battery consumption could be minimum by pulling out the stem





Featured by Shock Detection

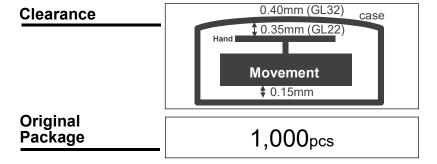

Assembled Hour Wheel
Dust Proof
Covered Coil
Super Quick Date Adjusting
Easy Assembling on Flat Desk

Time measurement

Accuracy

The unit (gate) time of measurement must be set at "10 sec." and the measurement must be performed in the form of complete watch.



