



must be minimum
600 $^{+200}_{+0}$ μm

Mark	X	Y	R
GM	0	0	—
DH1	3000	13000	—
DH2	2100	-12800	—
a1	3286	14934	430
a2	1865	15186	430
a3	-15151	2129	430
a4	-15291	555	430
a5	5978	-14084	430
a6	4474	-14631	430

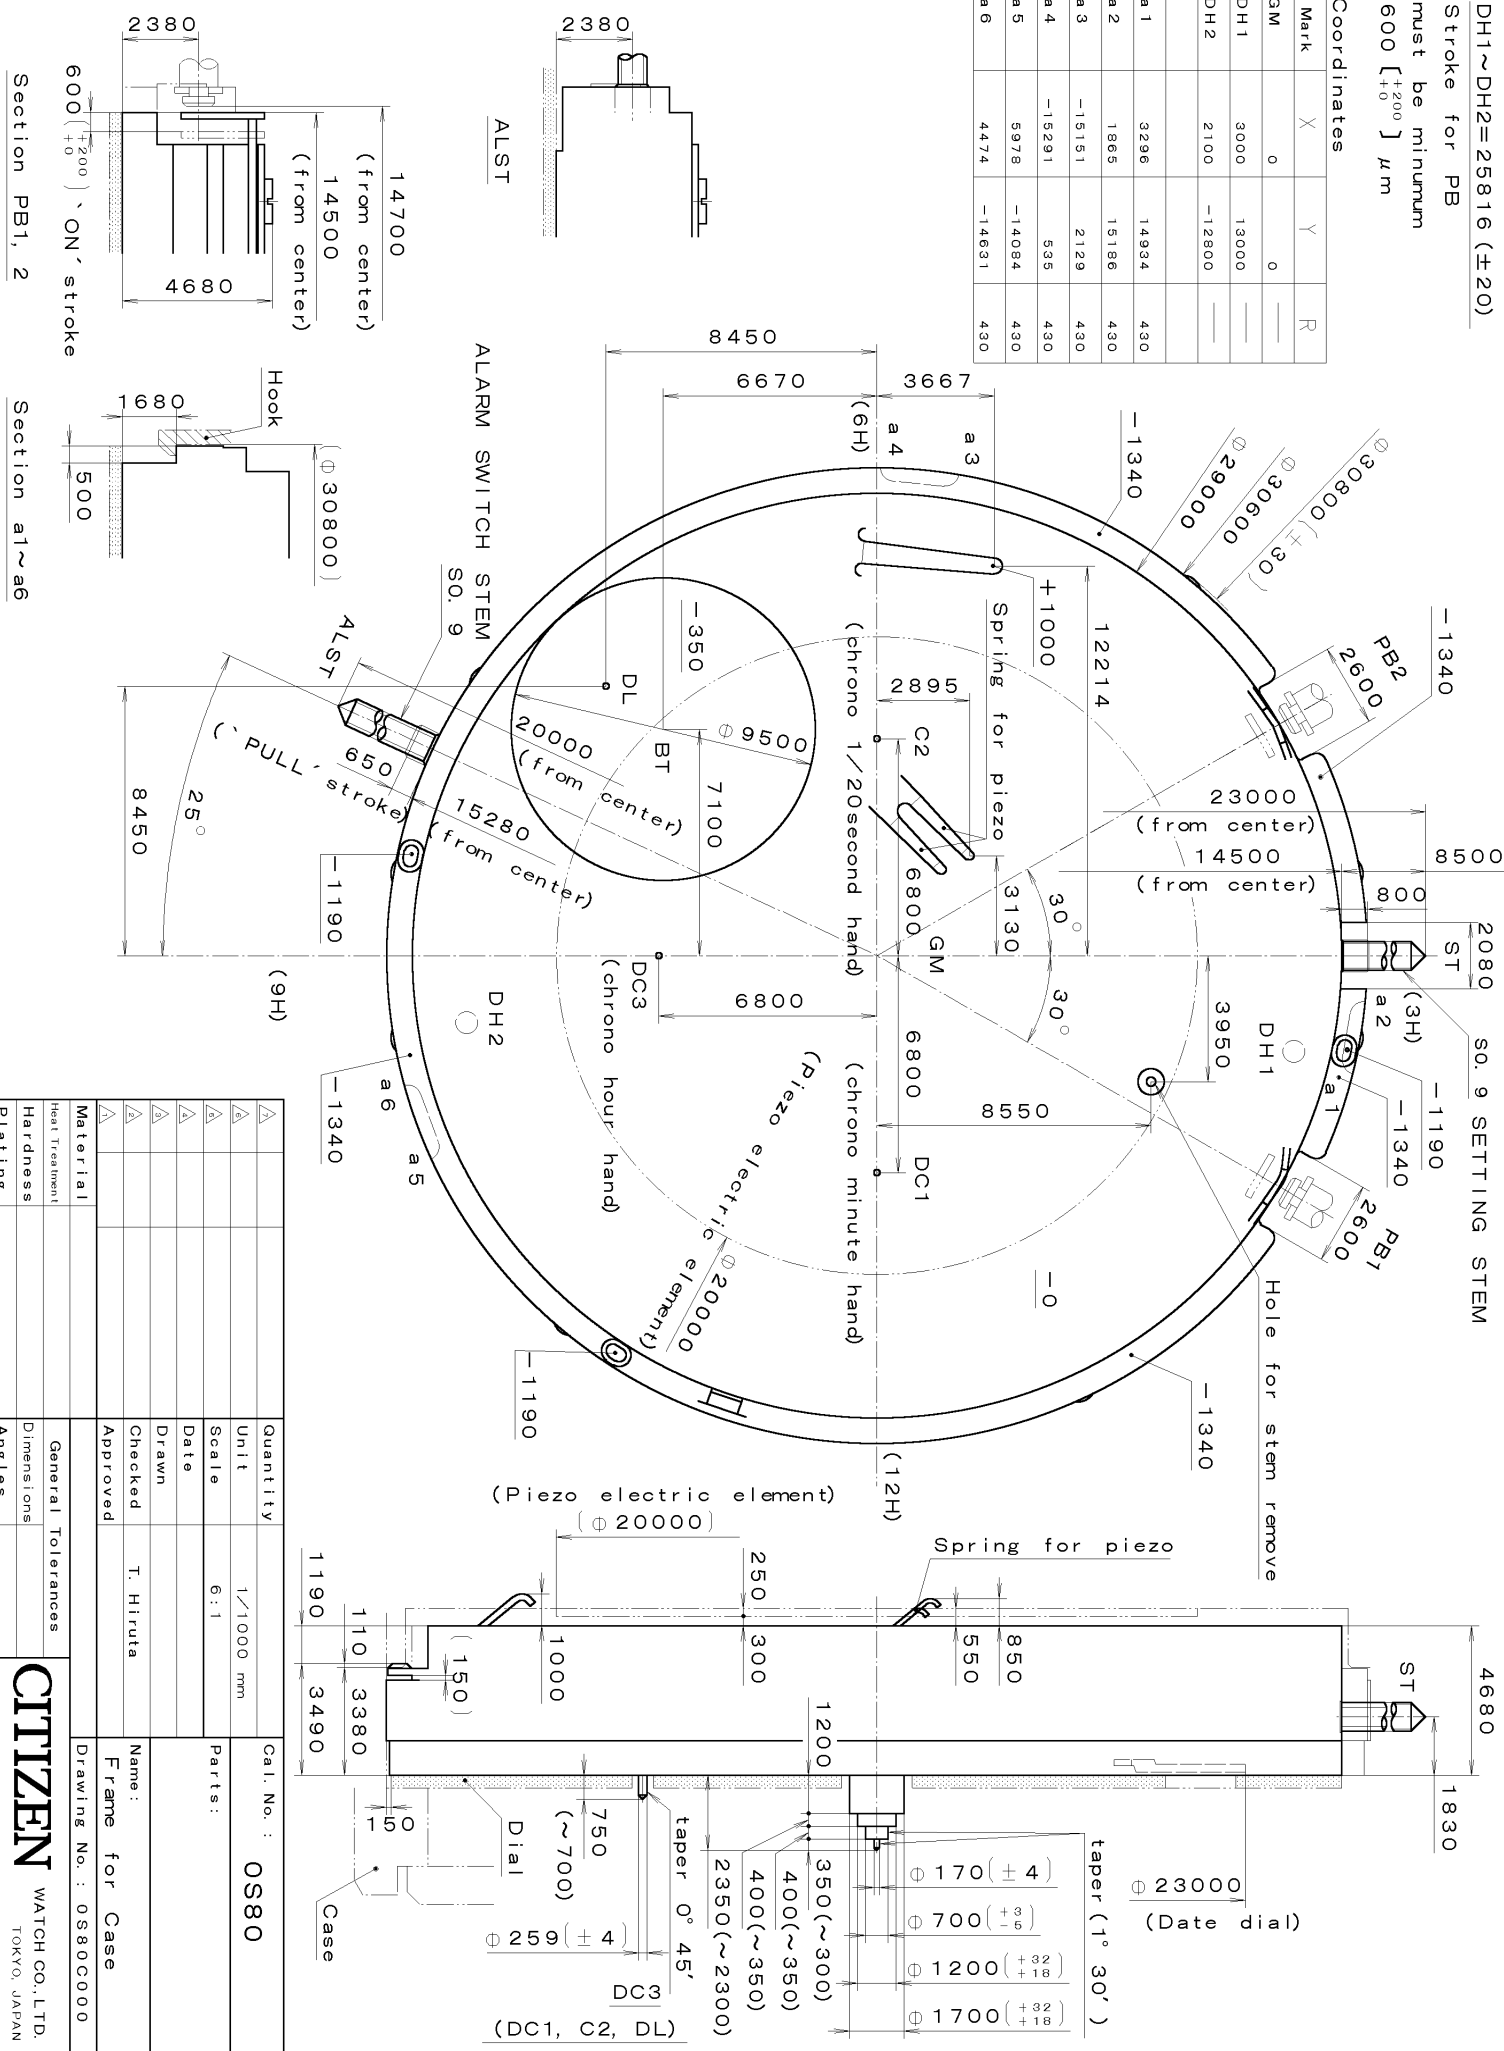

This drawing is provisional and subject to our reconfirmation and/or revision without notice.


*** TIPW OS80-00A (01) *** (2100 1121) 01-02-07

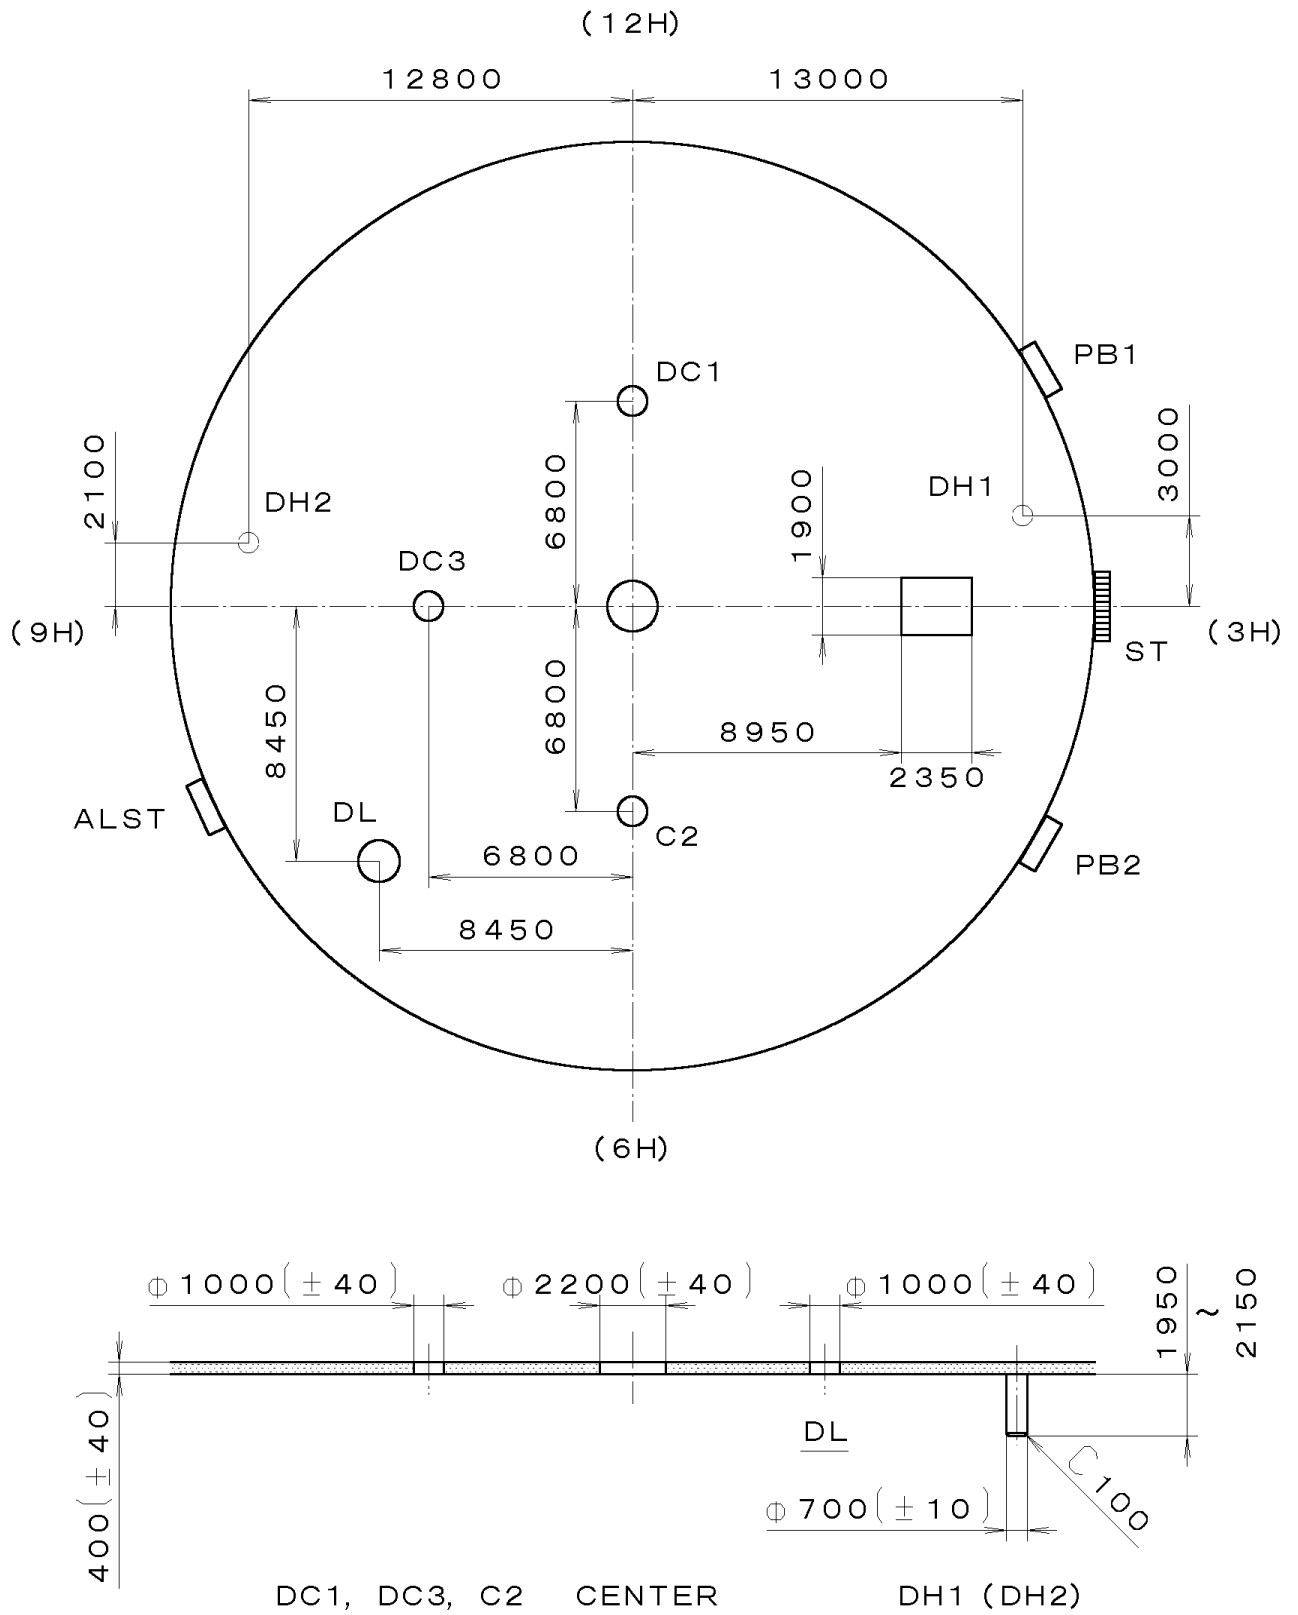

7			Quantity		Cal. No. : OS80-00A
6			Unit	1/1000 mm	
5			Scale	4:1	
4			Date		Parts:
3			Drawn		
2			Checked	T. Hiruta	
1			Approved		Name : Indications for Dial
Material					Drawing No. : OS80D000
Heat Treatment			General Tolerances		CITIZEN WATCH CO.,LTD. TOKYO, JAPAN
Hardness			Dimensions		
Plating			Angles		

This drawing is provisional and subject to our reconfirmation and/or revision without notice.

*** T I P W (01) *** (2100 1121) 00-07-06



Section A-A

SO. 9, P=0. 225mm

1000

8500

5500

18785

A

A

7			Quantity		Cal. No. :
6			Unit	1/1000 mm	
5			Scale	20:1	Parts:
4			Date		065-453
3			Drawn		
2			Checked	T. Hiruta	Name:
1			Approved		SETTING STEM
Material					Drawing No. : 4530S000
Heat Treatment			General Tolerances		CITIZEN WATCH CO., LTD. TOKYO, JAPAN
Hardness			Dimensions		
Plating			Angles		

This drawing is provisional and subject to our reconfirmation and/or revision without notice.

*** T I P W (01) *** (2100 1121) 00-07-03

			Quantity		Cal. No. :
			Unit	1/1000 mm	
			Scale	20:1	Parts:
			Date		065-513
			Drawn		
			Checked	T. Hiruta	Name:
			Approved		SETTING STEM
Material					Drawing No. : 5130S000
Heat Treatment			General Tolerances		CITIZEN WATCH CO., LTD. TOKYO, JAPAN
Hardness			Dimensions		
Plating			Angles		

S0. 9, P=0. 225mm

