
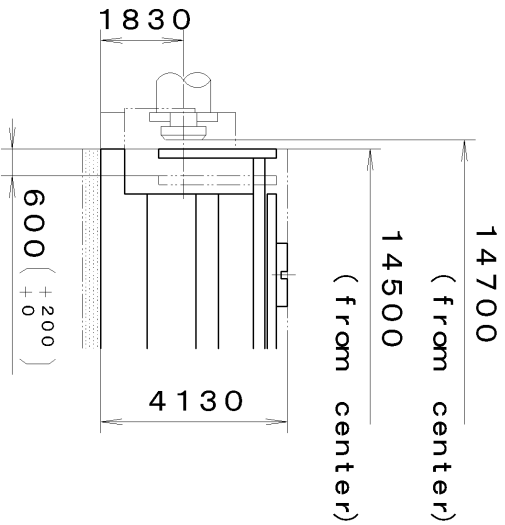


DH1~DH2=25816 (±20)


Stroke for PB
must be minimum
600 [$+200$] -0 μm

Coordinates

Mark	X	Y	R
GM	0	0	—
DH1	3000	13000	—
DH2	2100	-12800	—
a1	3441	14908	430
a2	1865	15186	430
a3	-15151	2129	430
a4	-15291	535	430
a5	10434	-11190	430
a6	9208	-12219	430

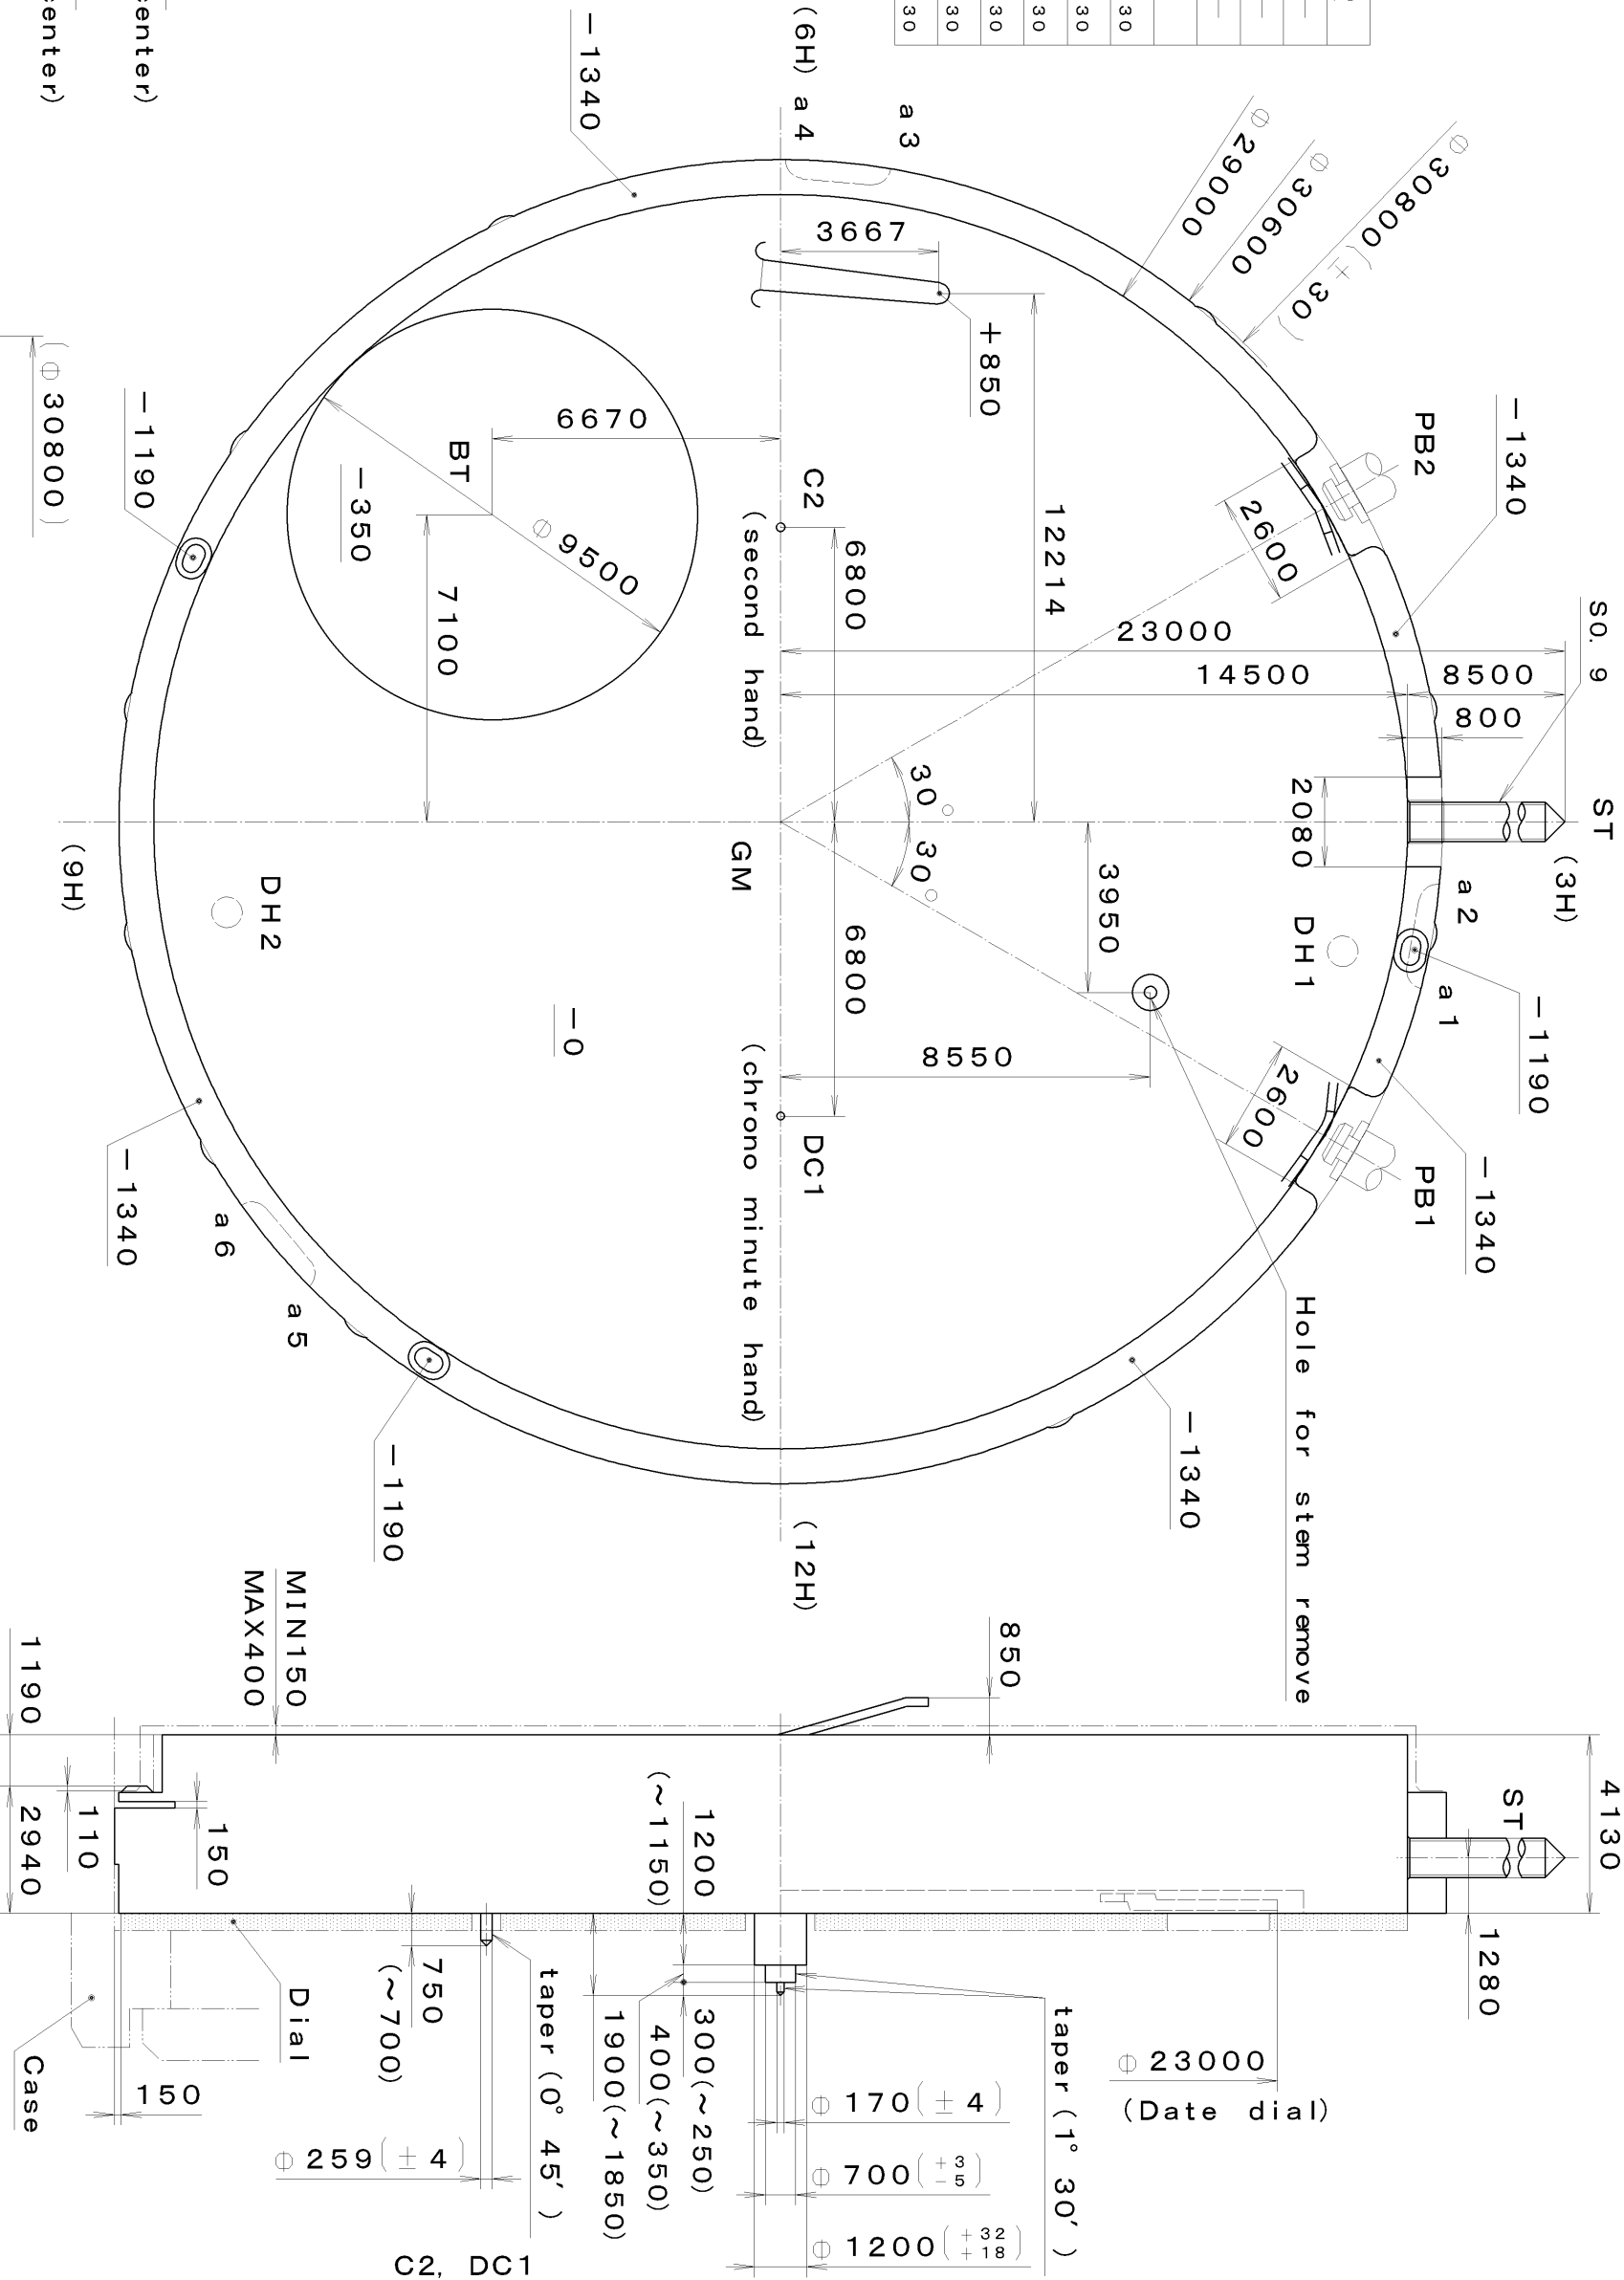

Section PB1, 2

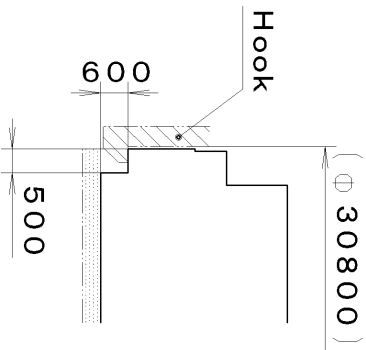


Section a1~a6

Quantity	Unit	1/1000 mm	Cal. No. : OS11
Scale	6:1		Parts :
Date			
Drawn			
Checked	T. Hiruta		Name :
Approved			Frame for Case
Material			Drawing No. : OS11C000
Heat Treatment			
Hardness			
Plating			

This drawing is provisional and subject to our reconfirmation and/or revision without notice.

*** TIPW OS11-00A (01) *** (2100 1121) 03-01-08

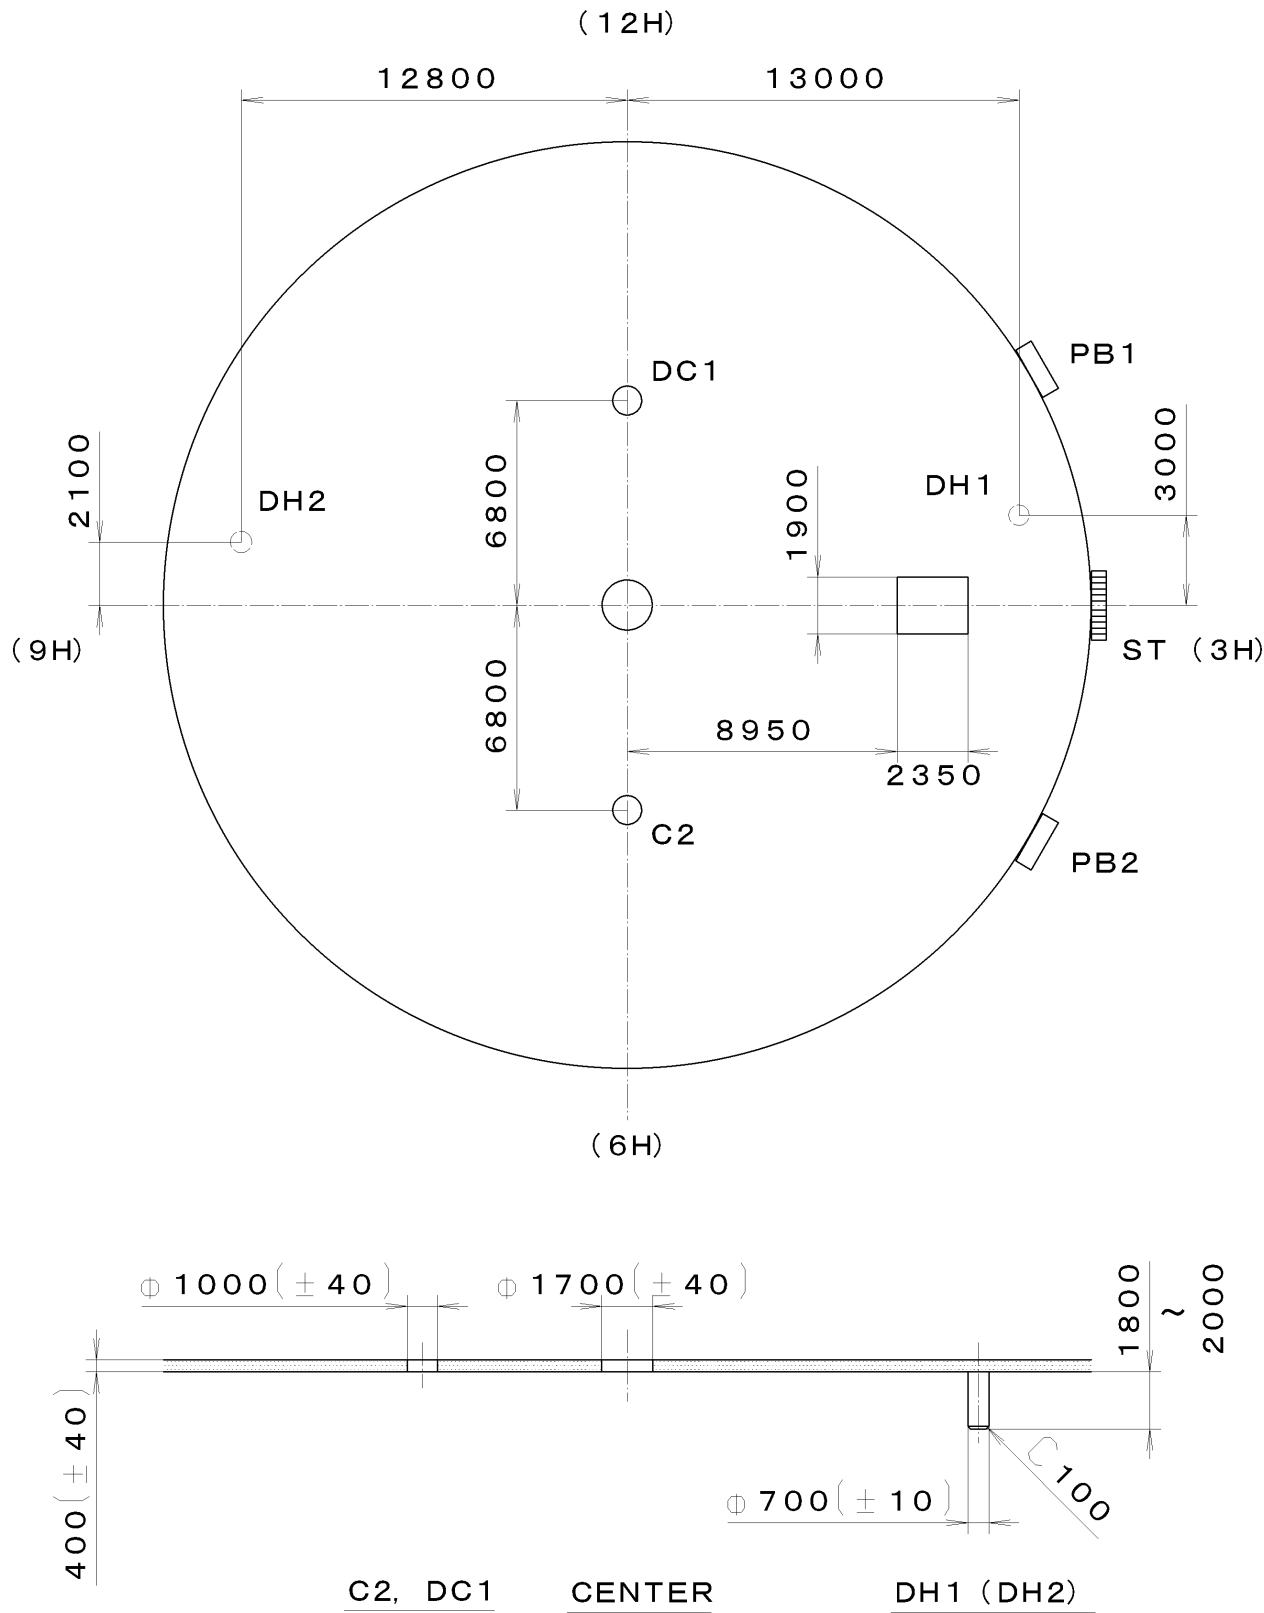

7			Quantity		Cal. No. : OS11-00A
6			Unit	1/1000 mm	
5			Scale	4 : 1	Parts :
4			Date		
3			Drawn		
2			Checked	T. Hiruta	
1			Approved		Name : Indications for Dial
Material					Drawing No. : OS11D000
Heat Treatment			General Tolerances		CITIZEN WATCH CO., LTD. TOKYO, JAPAN
Hardness			Dimensions		
Plating			Angles		