


*** T I P W 6 P 8 9 (0 1) *** (2 1 0 0 1 1 2 1) 0 0 - 0 7 - 2 6

Mark	X	Y	R
GM	0	0	—
DH5	−8759	6900	—
DH6	8281	−7500	—
a1	2351	11100	200
a2	7285	9131	200
a3	10800	3480	500
a4	10800	−3480	500
a5	3480	−10800	500
a6	−2700	−11100	200
a7	−5389	−10216	300
a8	−10800	−3480	500
a9	−10800	3480	500
a10	−3480	10800	500
b1	9651	6360	150
b2	7928	8331	150
b3	−5773	9946	150
b4	−7889	8415	150
b5	−9572	−6374	150
b6	−7916	−8342	150
b7	9196	−6906	150
b8	10501	−4680	150


	H
With Battery strap	4000
Without Battery strap	3850

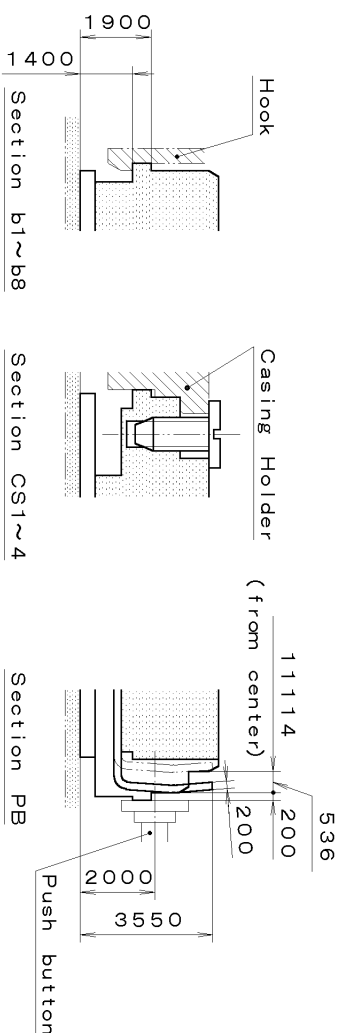

WATCH CO., LTD.
TOKYO, JAPAN

This drawing is provisional and subject to our reconfirmation and/or revision without notice.


*** T I P W 6P89-00A (01) *** (2100 1121) 00-07-24

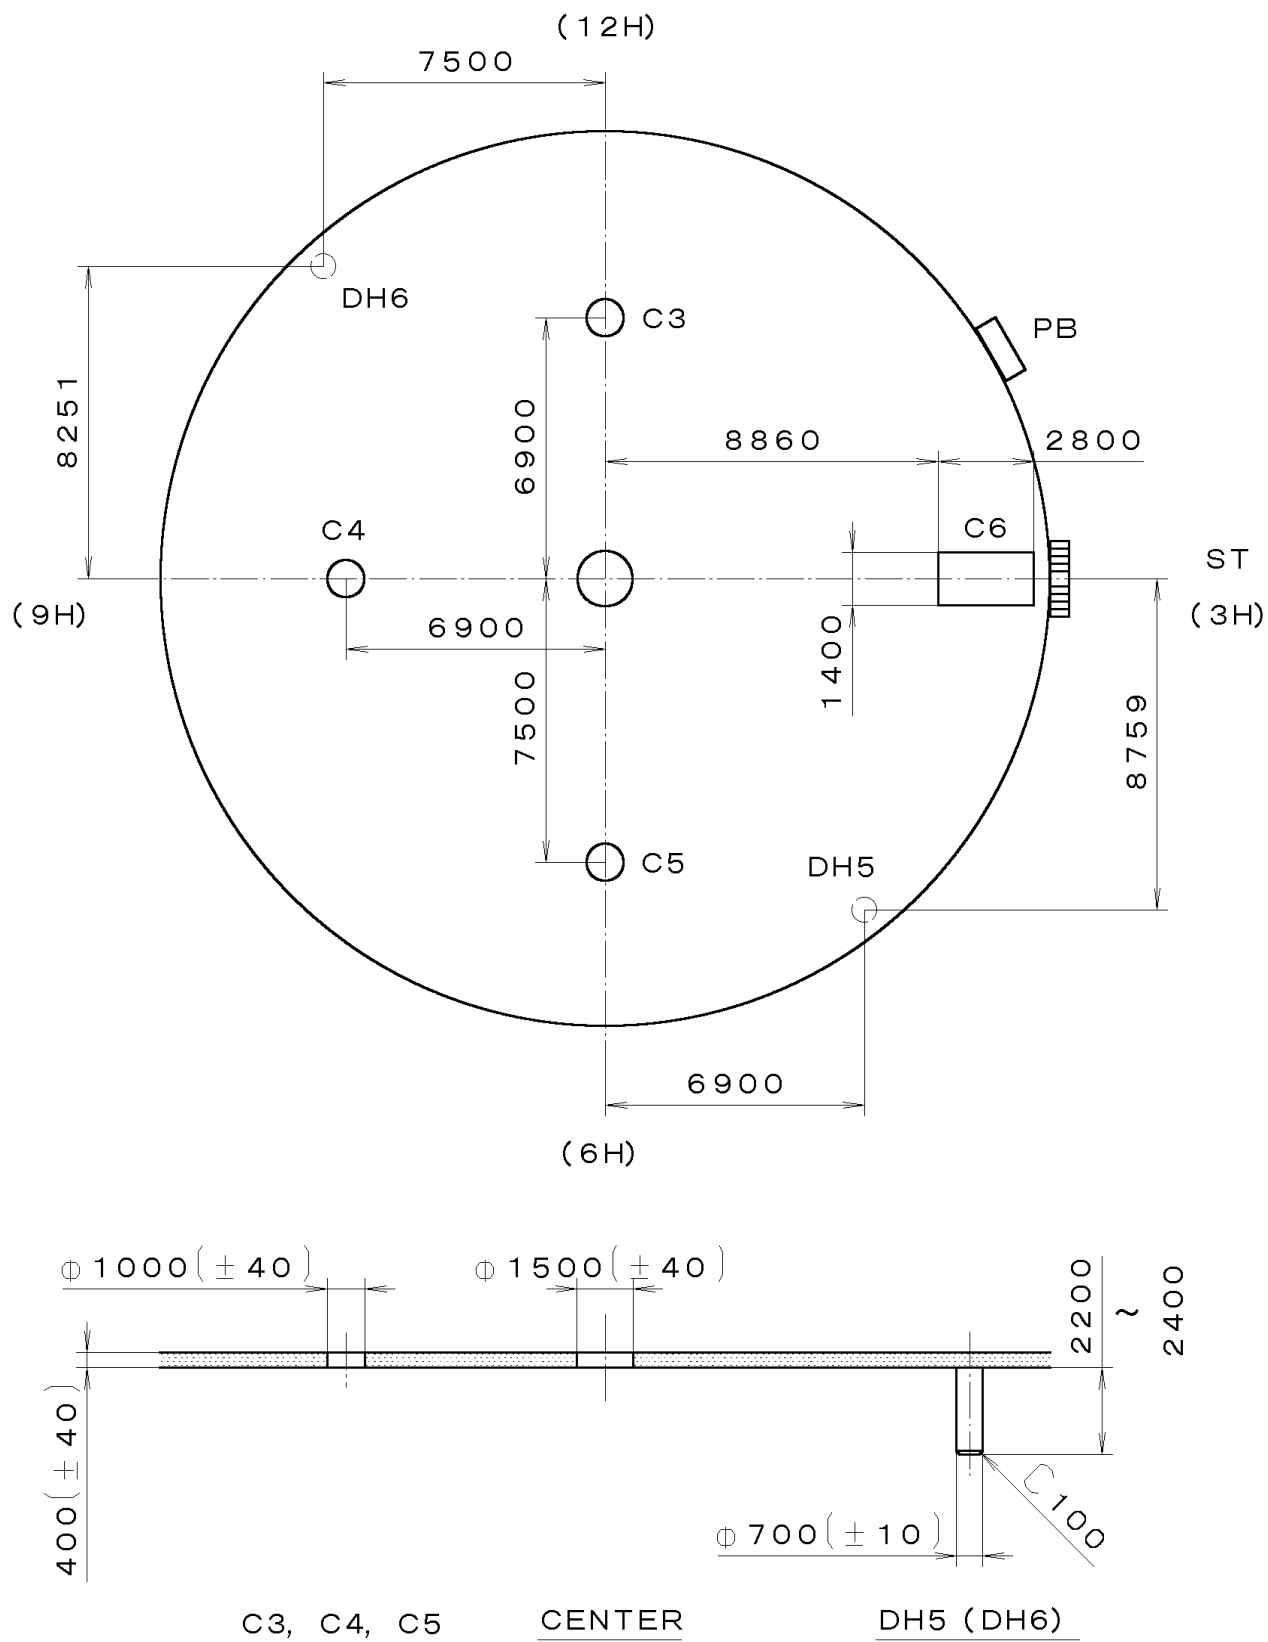

7			Quantity		Cal. No. : 6P89-00A
6			Unit	1/1000 mm	
5			Scale	5:1	Parts:
4			Date		
3			Drawn		
2			Checked	T. Hiruta	
1			Approved		Name : Indications for Dial
Material					Drawing No. : 6P89D000
Heat Treatment			General Tolerances		CITIZEN WATCH CO.,LTD. TOKYO, JAPAN
Hardness			Dimensions		
Plating			Angles		

This drawing is provisional and subject to our reconfirmation and/or revision without notice.

065-379 (01) *** (2100 1121) 00-06-23

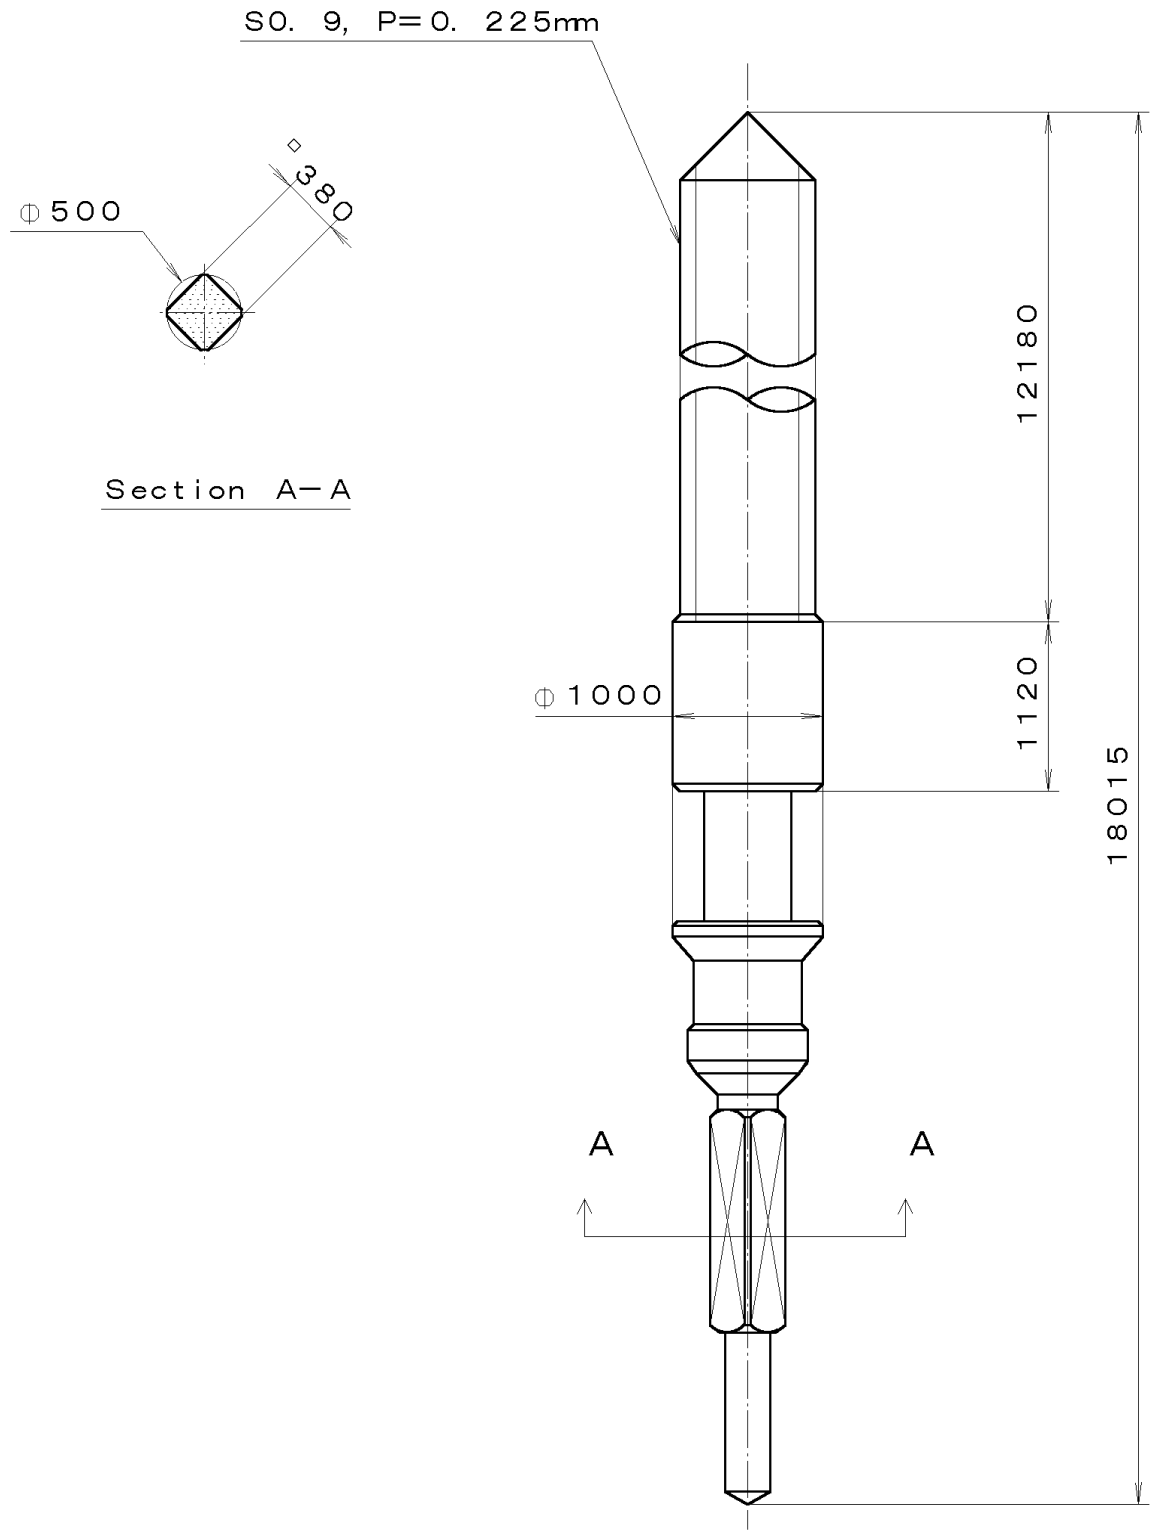

7			Quantity		Cal. No. :
6			Unit	1/1000 mm	
5			Scale	20:1	Parts:
4			Date		065-379
3			Drawn		
2			Checked	T. Hiruta	Name:
1			Approved		SETTING STEM
Material					Drawing No. : 3790S000
Heat Treatment			General Tolerances		CITIZEN WATCH CO., LTD. TOKYO, JAPAN
Hardness			Dimensions		
Plating			Angles		